



Flange Fit Flange Repair Clamp

► Stops leaks in flange gaskets

Flange Fit Repair Rings are designed for easy installation.

No special surface preparation is required prior to installation.

The product can be installed by your own personnel and can be used multiple times.



Bolt leakage is stopped by the injection of a suitable sealant fluid via sufficient injection sockets.

In case of a small gap between the line flanges, gaskets can be installed for temporarily sealing prior and during injection.

Detailed design is done based on line temperature, design temperature and design pressure.


In order to be able to quote the correct product, please download and complete the Flange Fit Data Sheet from our website and send it to us.

Clamps are hydrottested as per ANSI class at 1.3 x operating pressure

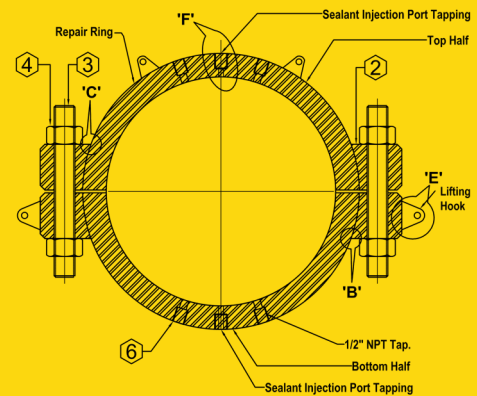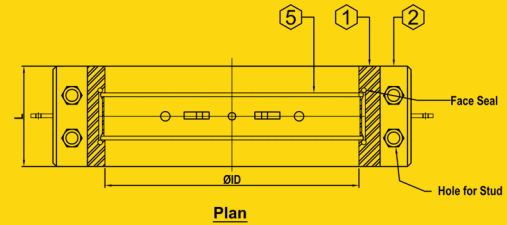

► Material specifications

Standard Clamp Components	
Body	ASTM A516
Stud Bolts	A193 Gr. B7
Nuts	A194 Gr. 2H
Gaskets	NBR (others available on request)



Offices and factory:
Kerkdijk-Zuid 11a
5492 HW Sint Oedenrode
The Netherlands

T +31 88 765 44 50
F +31 88 765 44 51
E sales@romaconpetro.com